

Colibri Z-Wave

Product nr. CC-C-1



About


Colibri enables system integrators and DIYs to integrate Z-Wave with other (professional) systems (e.g. Modbus) and create advanced visualization with high level automation in no time. Colibri supports not only Z-Wave, but also: Modbus, Google Assistant, Amazon Alexa, Sonos, Samsung Smart TV, LG Smart TV, Philips Hue, IP cameras, DSC, Paradox, Satel, Kodi, Global Caché, IRTrans, TCP/IP devices, Fronius and foobot.

Technical Specifications

Product description:	home automation server
Recommended usage:	residential apartments, small - average residential house
Support for:	Z-Wave, Modbus, BACnet, Amazon Alexa, Google Assistant, IP cameras, Sonos, Philips Hue, IP cameras, TCP/IP devices, DSC alarm, Satel alarm, Paradox alarm, KODI, Global Caché, etc.
Software:	bOS PRO License with 2 Users included
Size:	122 mm x 122 mm x 39 mm (WxHxD)
CPU:	1,2 GHz quad-core ARM
RAM:	1 GB
Disk size:	SD card 32 GB
Connectors:	Z-Wave, 4 x USB, 1 x Ethernet port
OS:	Linux
Power supply:	100-240V 50/60 Hz
Power consumption:	3-5 W



Dimensions

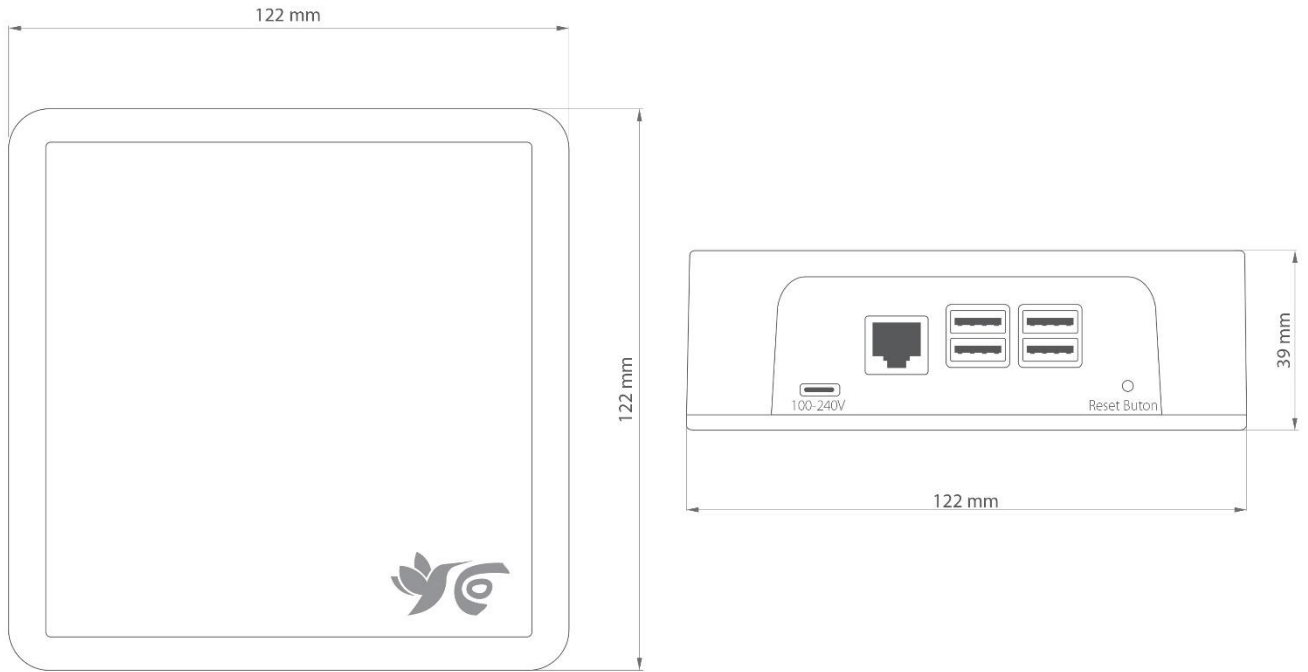

Wiring diagram

